


# MANCHON DE JONCTION CUIVRE

**FICHE TECHNIQUE**



Code GSL	Réf. GSL	Section cable (mm <sup>2</sup> )		Ø i (mm)	Ø e (mm)	L (mm)
		Rigide	Souple			
<b>Série "MJ ... CT" (Entrées tulipées)</b>						
1000008424	MJ 6 CT		6	3,3	5,5	24
1000008392	MJ 10 CT		10	4,3	6,8	29
1000008398	MJ 16 CT		16	5,3	8	34
1000008405	MJ 25 CT		25	6,6	9,5	34
1000008409	MJ 35 CT	35	25	7,9	11	34
1000008415	MJ 50 CT	50	35	9,2	12,5	44
1000008427	MJ 70 CT	70	50	11	15	49
1000008430	MJ 95 CT	95	70	13,1	17	55
1000008394	MJ 120 CT	120	95	14,5	19	59
1000008396	MJ 150 CT	150	120	16,2	21	65
1000008400	MJ 185 CT	185	150	18	23	74
1000008403	MJ 240 CT	240	185	20,6	26	79
1000008407	MJ 300 CT	300	240	23	28	89
1000008411	MJ 400 CT	400	300	26	32	99

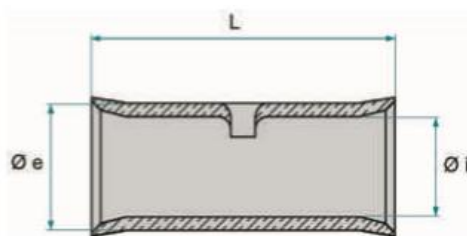

**EDDEP**  
LA PERFORMANCE ÉNERGÉTIQUE